

REMARKS

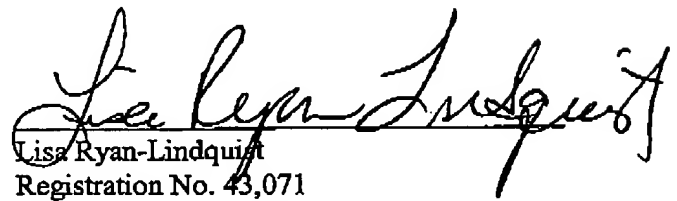
The specification has been amended to correct an inadvertent typographical error.
The change is supported by the specification. No new matter has been added.

Respectfully submitted,

VIDAS, ARRETT & STEINKRAUS

Date: July 12, 2002

By:


Lisa Ryan-Lindquist
Registration No. 43,071

Suite 2000
6109 Blue Circle Drive
Minnetonka, MN 55343-9185
Telephone No.: (952) 563-3000
Facsimile No.: (952) 563-3001
FAWPWORKFORMSPREAMDFRM

MARKED UP VERSION TO SHOW CHANGES MADEExample 1

Amorphous polypropylene P #1023 supplied by the Eastman Chemical Co. was mixed with HM 410 Starbond ferrite powder supplied by Hoosier Magnetics in amounts of [85] 15 wt-% polypropylene and [15] 85 wt-% of the ferrite powder. The resultant mixture was processed at a temperature of between about 325 °F and 375 °F (about 165 °C to about 190 °C) and formed into ribbons using an extruder/slot die head on a printable paper substrate. The thickness of the mixture was varied between about 0.003 and 0.012 inches (μ to μ).